

Wireless or Wired Instant Broadband Access with Internet Sharing



This 802.11g wireless gateway/router adds considerable power and flexibility to your network. Six products in one, it combines an ADSL2+ modem, router, four 10/100 LAN RJ45 ports, 802.11g access point, SPI double firewall, USB2.0 Host and VoIP. It gives you untethered continuous connectivity to your network resources, the Internet, Voice and IPTV. Featuring real time QoS and 802.11g wireless, it allows you to download large files, videoconference, and distribute and play high-definition digital movies, photos, and MP3s in the blink of an eye. Simple to use, it plugs directly into your ADSL2+ line. The integrated voice features let you use it with DECT and analog telephones. Setup couldn't be easier—NETGEAR's Smart Wizard install assistant and on-screen help guide you through each step. The Smart Wizard automatically detects and makes the best connection to your ISP. The double firewall protects your network against intruders, including logs and alerts of break-in attempts, while VPN pass-through makes it safe to connect to your business network from home. The contemporary design of this Gateway suits your home or office.

Faster than Ever

The DVG834G gives you instant connectivity with or without wires, and works with your existing 802.11g/b devices. A built-in ADSL2+ modem provides direct, always-on Internet connectivity and multi-user access sharing at downstream speeds of up to 24 Mbps with up to 3.5 Mbps upstream speeds. This powerful router distributes real time MP3s, digital movies and VoIP in addition to data traffic including Web browsing, Network Storage access, graphics and photos and shares a single IP address with up to 253 users.

Hassle Free

No need for a separate modem—this connects directly into your ADSL2+ line. Built-in port forwarding settings, Universal Plug and Play (UPnP™) and virtual private network (VPN) pass-through make it simple to play Internet games, stream or download video, make phone calls and host Internet services. It supports PCs, Apple Computers, and virtually all Ethernet devices. It comes with an Ethernet cable for connecting your first computer.


Secure

Double firewall using Stateful Packet Inspection (SPI) and intrusion control features Denial of Service protection from hacker attacks, while VPN (Virtual Private Network) pass-through permits secure access to your office or corporate network and enables you to host VPN services. It also logs browsing activities and provides optional email alerts so you can monitor access. DMZ support allows unrestricted access from the Internet to one computer (for hosting web services).

Attached Storage

Models with the USB 2.0 Host include the SAMBA Storage management agent, which enables attached computers to have "Mapped Drive" access to the USB-attached storage. This delivers extremely low cost Network Storage and Backup for consumers.



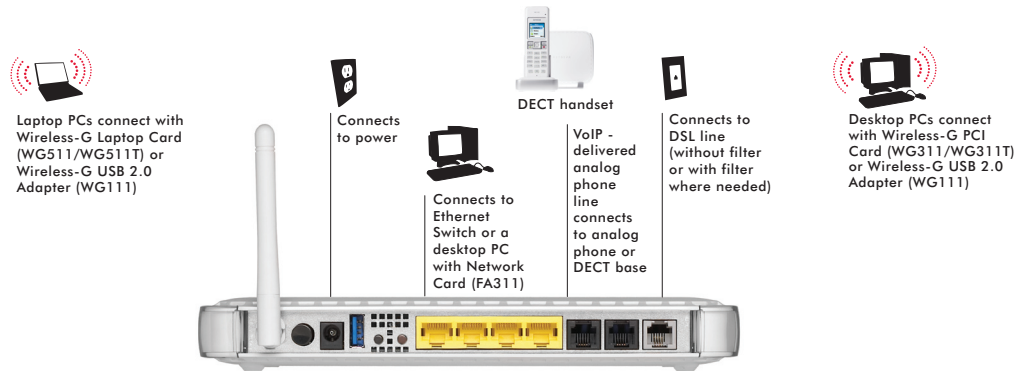

System Requirements

- ADSL2/2+ Internet service
- 2.4 GHz 802.11g WiFi adapter or Ethernet adapter for each computer
- Microsoft Windows Vista, XP, 2000, and other operating systems running a TCP/IP network
- Microsoft® Internet Explorer 5.0 or higher
- VISTA Ready

Physical Interfaces

- LAN: Four 10/100 Mbps auto-sensing MDIX, Auto Uplink™ RJ-45 ports
- WAN Port: ADSL2+ Annex A, B, M or L
- Wireless: 802.11g in the 2.4 GHz band
- USB 2.0 Host
- FXS for analog phones (2 lines)

Security

- Intrusion logging and reporting
- DoS Detection
- VPN NAT traversal (VPN pass-through) for IPSec, PPTP and L2TP VPNs

VoIP Voice Features

- Attached IP telephony devices
- Call hold, transfer, forwarding, return, conference, redial, Caller ID
- Codecs: G.711, G.723.1, G.726, G.729a
- G.168 Echo Cancellation
- G.711 fax pass through
- Power failure transfer to PSTN
- SIP Pass-Thru (for VoIP calls)
- Speed dial, anonymous call suppression
- T.38 Fax relay

Power

- Adapter: 12V DC, 1.5A

- ON/OFF Power Switch

- Input Power: 18W

Physical Specifications

- Dimensions: 223 x 153 x 31 mm (8.8 x 6.0 x 1.2 in)
- Weight: 0.5 kg (1.06 lb)

Environmental Specifications

- Operating temperature: 0° to 40° C
- Operating humidity: 90% maximum

Warranty

- US: NETGEAR 1-year warranty
- Rest of world: 2-years

Package Contents

- ADSL2+ Gateway (DVG834G, DVG834GB, DVG834GU or DVG834GBU)
- Power adapter, Ethernet cable
- Phone cable, Vertical stand
- Setup CD

Compliances

- CE, UL, FCC 15, A-TICK, C-TICK, WiFi

DSL Forum Compliant

- TR-059, TR-069
- TR-104, TR-106, TR-111

Network Management

- Local administration interface: Web-based GUI with protected user name and password
- Command line Interface
- Remote Web Management
- UPnP

LEDs (TR-068 Compliant)

- Internet
- LAN 1,2,3 & 4

- Power

- USB

- ADSL Down / Upstream active (1 LED)

- Voice lines active

- Wireless

Application Layer

Routing / Switching

- DHCP, DNS (proxy & dynamic)
- TFTP (for VoIP configuration data)
- HTTP, IPCP, IRC
- NNTP, NTP, RTP, RTSP
- Selectable RFC 3263 DNS server
- SMTP, TELNET

Network/Internet Layer

- ARP, Disable, Enable NAT/PAT
- IGMP, IGMP Proxy & IGMP Snooping
- IP (IPv4)
- IP Fragmentation & Reassembly
- IPoE, IP QoS, IPSec Pass-Through
- NAT/PAT, RARP, Static Routing

WiFi

- 802.11x
- Disable SSID broadcast
- MAC address Access Control
- Multiple SSIDs, WDS, WEP 64/128 bit
- WMM-QoS, WPA, WPA-PSK, WPA2, WPA2-PSK, WPS with pin & pushbutton

DVG834G Product Family Summary

Model	DSL Annex(s)	USB Port
DVG834G	A,L,M	No
DVG834GB	B,L,M	No
DVG834GU	A,L,M	Yes
DVG834GBU	B,L,M	Yes

NETGEAR®

4500 Great America Parkway
Santa Clara, CA 95054 USA
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2008 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, NETGEAR Digital Entertainer Logo, Connect with Innovation, FrontView, IntelliFi, PowerShift, ProSafe, RAIDar, RAIDiator, X-RAID, RangeMax, ReadyNAS and Smart Wizard are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder (s). Information is subject to change without notice. All rights reserved.

*Free basic installation support provided for 90 days from date of purchase. Advanced product features and configurations are not included in free basic installation support; optional premium support available.

**Actual performance may vary due to operating conditions

PB-DVG834G-0